

8 way Combiner / Hybrid Coupler 350 ~ 520MHz

Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power(W)
5o8T1504401200350520NK	350~ 520	1.0 (Coupling 9dB)	23	1.2	N Female	400(8x50)
5o8T1504401200350520SK	350 ~ 520	1.0 (Coupling 9dB)	23	1.2	SMA Female	200(8x25)
5o8T1504401200400470NK	400~ 470	0.8 (Coupling 9dB)	25	1.2	N Female	400(8x50)
5o8T1504401200400470SK	400~ 470	0.8 (Coupling 9dB)	25	1.2	SMA Female	200(8x25)

Basic Specifications

Dimension	440*120*50mm	Operating Temperature	-40 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension(mm)

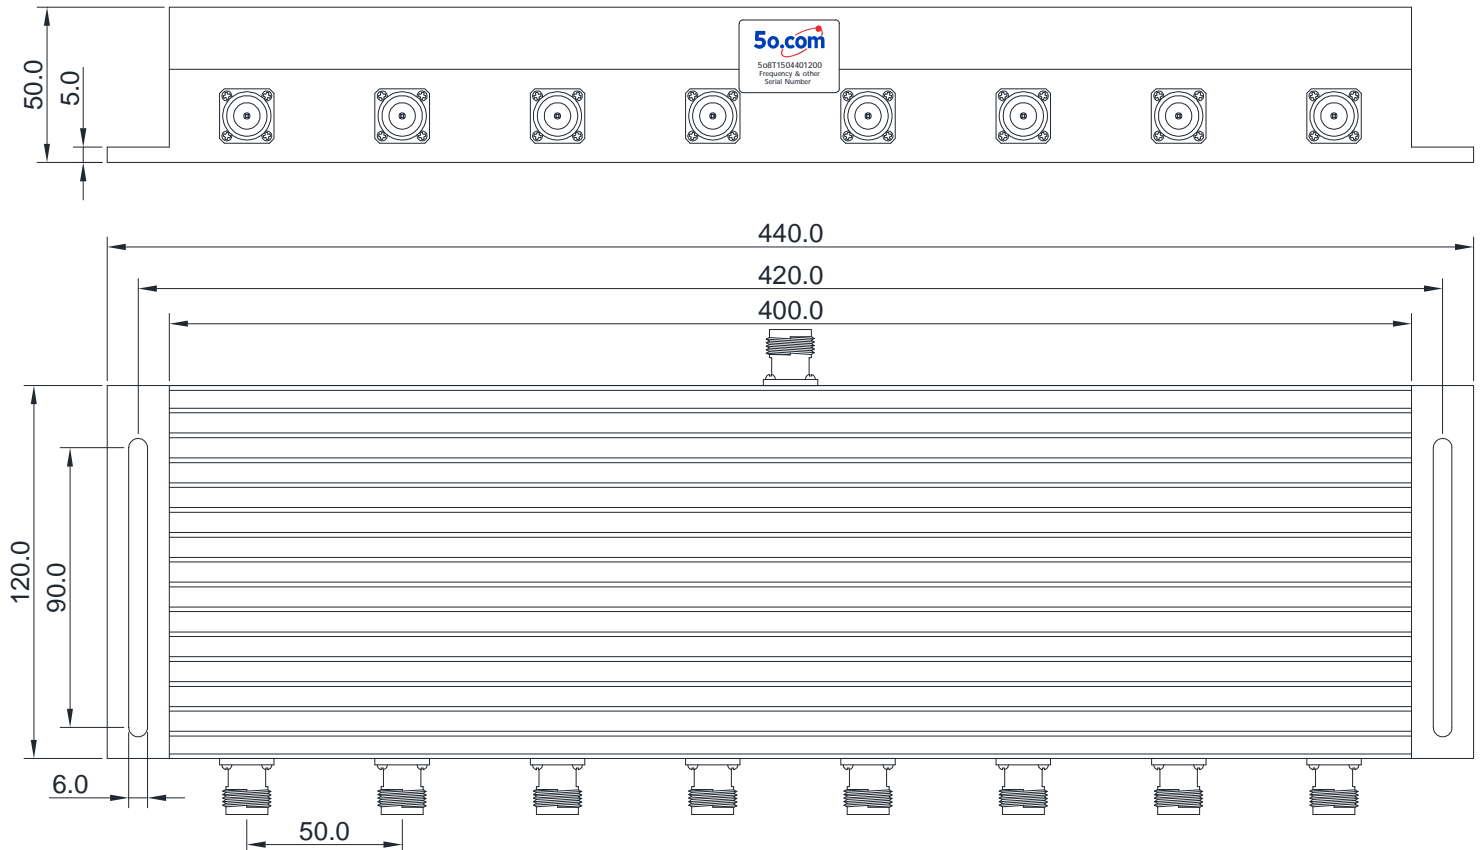

Tolerances: ±2% unless otherwise stated.