

## 2W Coaxial Termination DC-6GHz


### Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ Military, Space and Commercial applications.

### RF Characteristics


Part Number	Frequency range	Power	VSWR Max	Connector Type	Impedance
5o21206NJ	DC-6GHz	2W	1.25	N Male	50 $\Omega$

### Overall Dimension (mm)

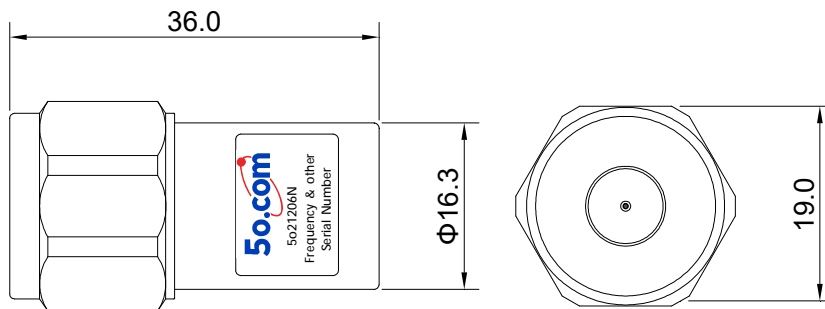

Tolerances:  $\pm 2\%$  unless otherwise stated.

### Power Derating Diagram

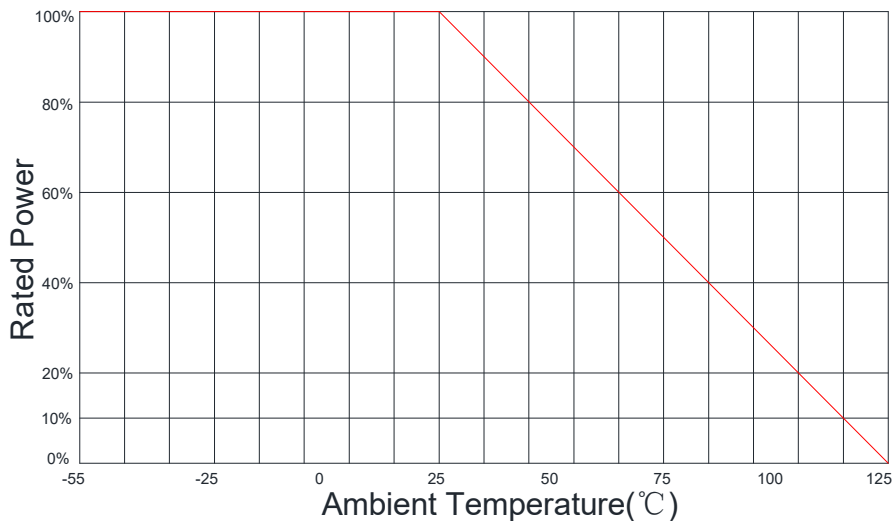

### Notes

- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.