

## Band Pass Filter 885 ~ 889MHz

### Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


### RF Characteristics

Part Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o26100690885889SK	885 ~ 889	3.0	1.5	70dB @925~960MHz 40dB @DC~880MHz	SMA Female
5o26100690885889NK	885 ~ 889	3.0	1.5	70dB @925~960MHz 40dB @DC~880MHz	N Female

### Basic Specifications

Dimension	100*69*43mm	Impedance	50Ω
Power	50W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

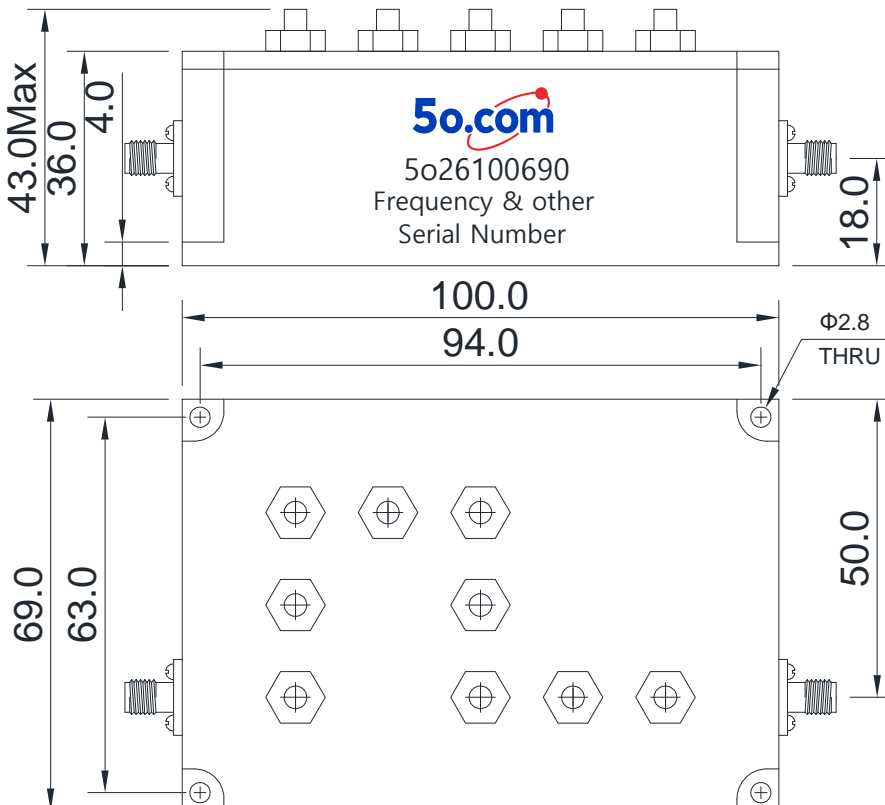

Tolerances: ±2% unless otherwise stated.