

# 3600 to 3800MHz Band Stop Filter

## Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o2917235036003800SK	3600 ~ 3800	DC~3350MHz 4050~7000MHz	50	2.0	1.5	SMA Female

## Basic Specifications

Dimension	172*35*16mm	Impedance	50Ω
Power	50W	Operating Temperature	-55~+85°C
Appearance color	Black	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

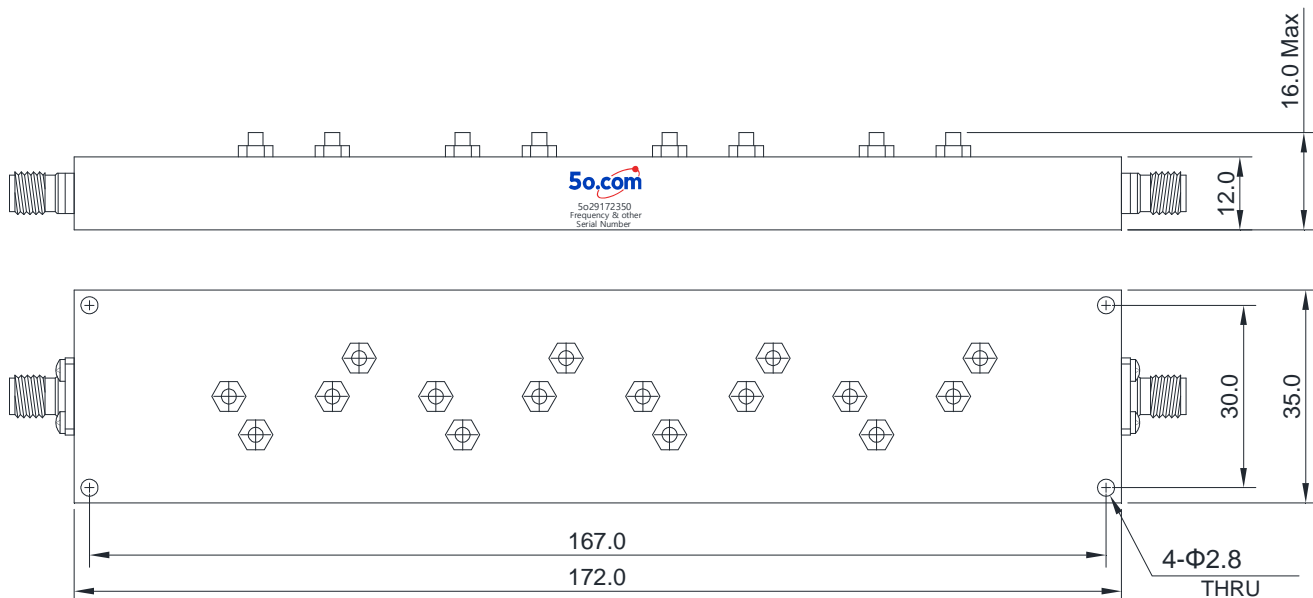

Tolerances: ±2% unless otherwise stated.