

2W Coaxial Attenuator DC-18GHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max
5o202018N3	DC-18.0GHz	2W	3 dB	±0.75 dB	1.3
5o202018N10			10 dB	±1.0 dB	1.3
5o202018N20			20 dB	±1.2 dB	1.3
5o202018N30			30 dB	±1.2 dB	1.3
5o202018N40			40 dB	±1.2 dB	1.4
5o202018N50			50 dB	±1.2 dB	1.4


Basic Specifications

Impedance	50Ω	Connector Type	N Male to Female
Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

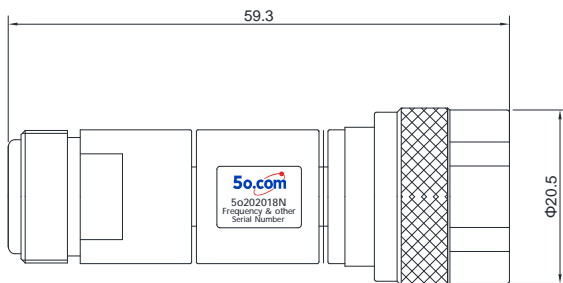


3 ~ 40dB

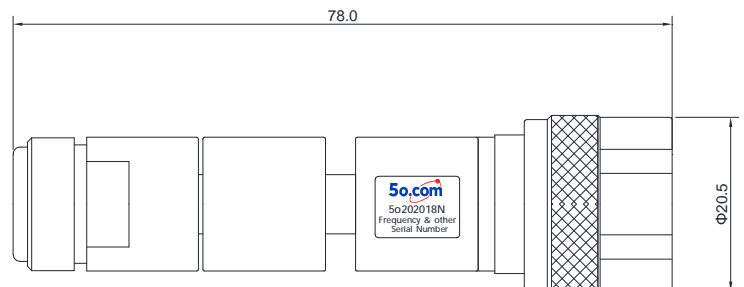

50dB

Tolerances: ±2% unless otherwise stated.

Power Derating Diagram

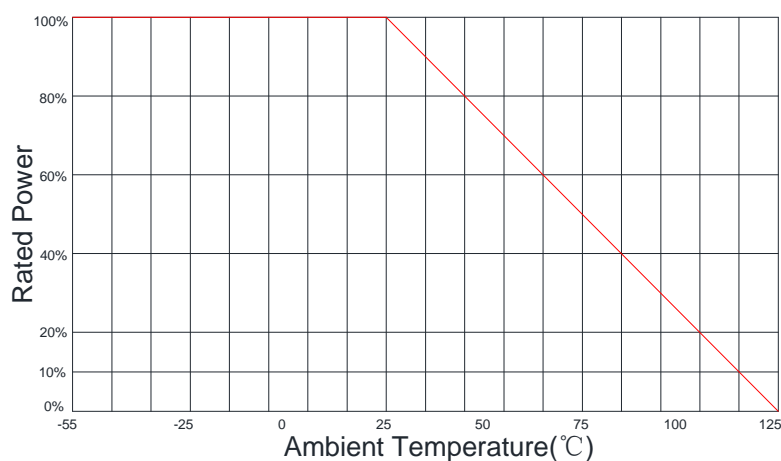

Notes

- ◆ Coaxial attenuator impedance matched to 50Ω.
- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ For products with a power of over 50W, pay attention to the direction during use and strictly avoid reverse connection.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.