

2 Way Power Divider 698 ~ 2700MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o31886006982700SK	698 ~ 2700	20	1.25	0.5(Split 3dB)	±5°	±0.4dB	SMA Female
5o31886006982700NK	698 ~ 2700	20	1.25	0.5(Split 3dB)	±5°	±0.4dB	N Female
5o31886006982700BK	698 ~ 2700	20	1.25	0.5(Split 3dB)	±5°	±0.4dB	BNC Female
5o31886008002500SK	800 ~ 2500	20	1.25	0.5(Split 3dB)	±5°	±0.4dB	SMA Female
5o31886008002500NK	800 ~ 2500	20	1.25	0.5(Split 3dB)	±5°	±0.4dB	N Female
5o31886008002500BK	800 ~ 2500	20	1.25	0.5(Split 3dB)	±5°	±0.4dB	BNC Female

Basic Specifications

Dimension	88*60*21mm	Impedance	50Ω
Splitter Power	50W	Operating Temperature	-40 ~ +85°C
Combiner Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

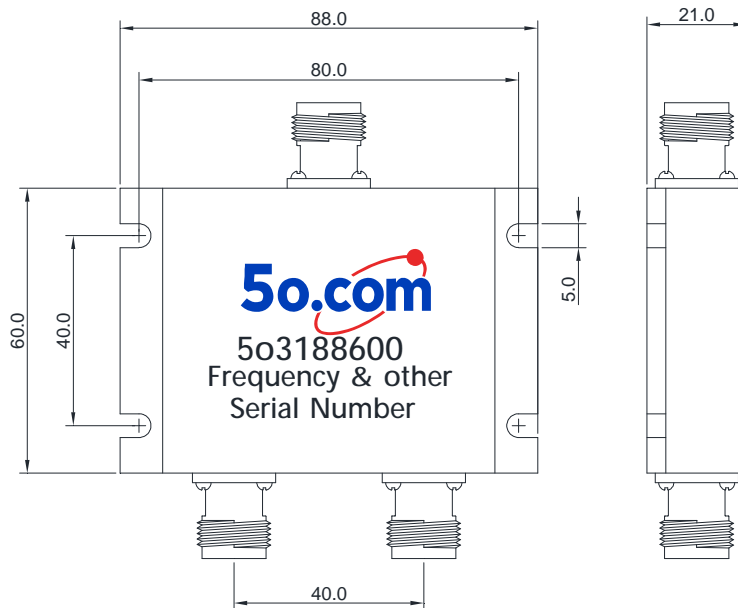

Tolerances: ±2% unless otherwise stated.